

EC-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EC-type examination in accordance with the article 10 of the PPE Directive (89/686/EEC) and has been shown to satisfy the relevant provisions of the Directive.

Certificate N° 0075/1609/162/01/18/0197

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer :

Distributor : /

Description

PPE Type : *protective glove against mechanical risks and micro-organisms*


Product reference : JNI

Glove description : NITRILE GLOVES

This product is a category II.

Available sizes : S/7(palm width105mm) M/8(palm width110mm) L/9(palm width115mm) XL/10(palm width120mm) XXL/11(palm width125mm)

Pictures :

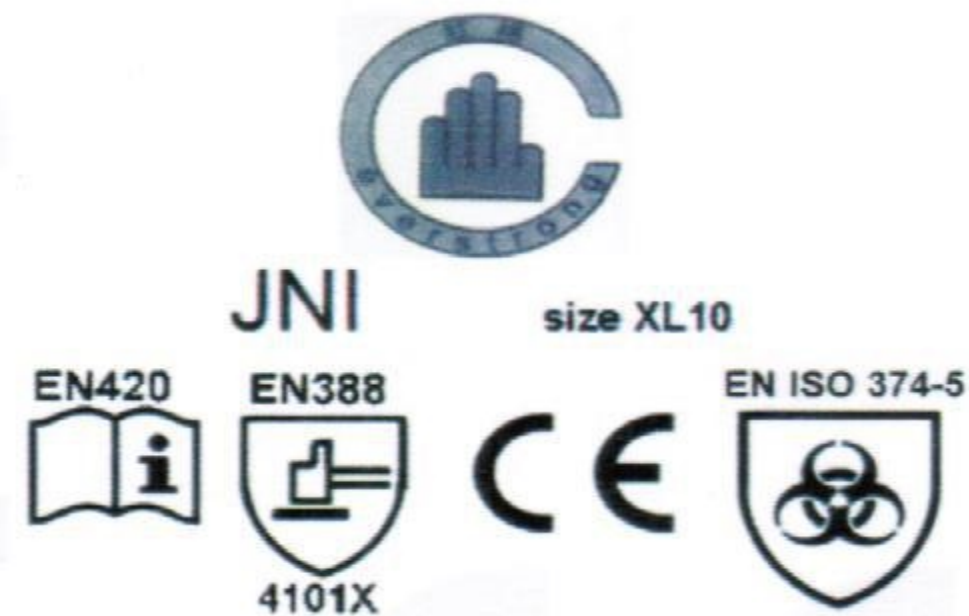

Reference standard :

Levels of performance / class of protection

EN 420:2003+A1:2009

EN 388:2016

The levels of performance have been measured on the palm

4 1 0 1 X

« X » means that the test hasn't been performed ; no protection is required

EN ISO 374-5:2016

Micro-organisms

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)


Full description of the PPE, reference rules verified in the context of the EC-type examination and information given on the product are detailed in the manufacturer's technical file index 01 dated from JANUARY, 2018

NOTA : Any modification to new items of the personal protective equipment object of this CE type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the CE type approval certificate (change of adress, change of company status) should be brought to the attention of the notified body in accordance with law n° R.4313-38 of the French Code of Work


Issued in Lyon by

Lionel Gaudillere
PPE certification manager

Date of issue : January 30th, 2018

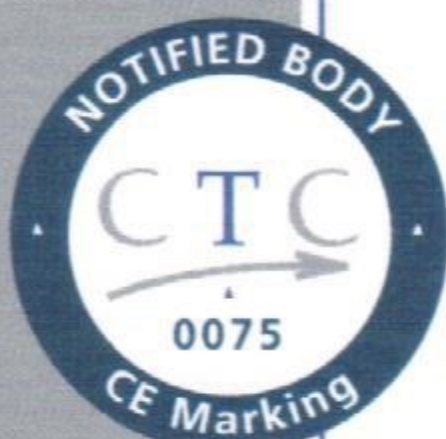

In application of the Directive 89/686/EEC of the 21th December 1989, concerning the alignment of member states legislation relating to personal protective equipment and in application of relevant requirements of the french labor code, providing by the transcription of these Directive into french regulation.

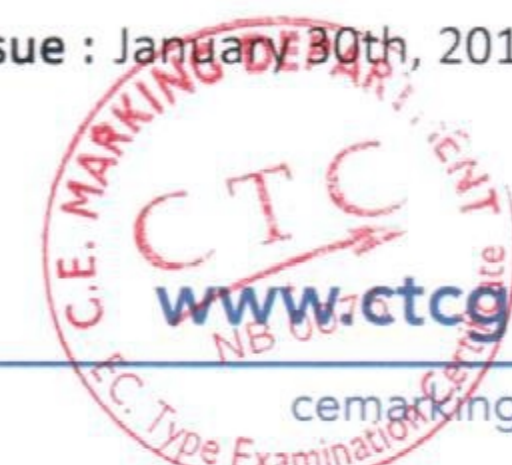

www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

MANUFACTURER'S TECHNICAL FILE

Reference of the product : JN1

Technical file index : 01

Last update : JANUARY, 2018

IDENTIFICATION

Reference of the product : : JNI
Basic model
Technical file index : : 01
Last update : : JANUARY, 2018

Manufacturer :

Factory :

GLOVE DESCRIPTION

Glove description :

NITRILE GLOVES

type of coating finish : no coating

Visual description :



Field of use, Risks against which the product protects :

mechanical risks & micro-organisms risks(part 2: determination of resistance to penetration)

Available sizes :

Minimum length of glove (mm)	Sizes
330	S/7(palm width105mm)
330	M/8(palm width110mm)
330	L/9(palm width115mm)
330	XL/10(palm width120mm)
330	XXL/11(palm width125mm)

Glove constitution :

	Reference	Color	Material	Surfacic mass	Gauges	Thickness
Palm		GREEN/ WHITE	NITRILE WITH WHITE BACKING(diamond texture finish)			15mil
Back		GREEN/ WHITE	NITRILE WITH WHITE BACKING			15mil
Cuff		GREEN/ WHITE	NITRILE WITH WHITE BACKING			12mil

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protection Equipment Directive (89/686/CE).

This glove is designed for mechanical risks and micro-organisms

It is a category II product.

GENERAL REQUIREMENTS

Standard EN 420 : 2003 + A1 : 2009

Dexterity : 5

PH of glove and lining is greater than 3.5 and lower than 9.5 : yes

Chromium VI lower than the detection limit :

Size : conform

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Mechanical hazard EN 388 : 2016

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	1
Tear strength resistance	0
Puncture resistance	1
Cut Resistance method (EN ISO 13997)	X
Impact Protection	-

The levels of performance have been measured on the palm
« X » means that the test hasn't been performed ; no protection is required

Micro-organisms EN ISO 374-5 : 2016

This glove comply the tests methods EN 374-2 : 2014

Protection offered	Performance levels
Water tighness	yes
Air tighness	yes

This glove is considered as micro-organism resistant, the quality acceptable level (AQL) is at least a level 2.

Quality acceptable level :	level 2 : < 1,5
----------------------------	-----------------

TEST REPORTS

Laboratory	CTC	Other
EN 420	D171120264	
Azo	D171120264	
EN 388	D171120264	
EN ISO 374-5	D171120264	
OTHER	D171120264	

MARKING - PACKAGING

Information printed on the glove :

Logo of the authorized representative :

Logo 


Glove's reference : JNI

Size indicator

Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Marking example :

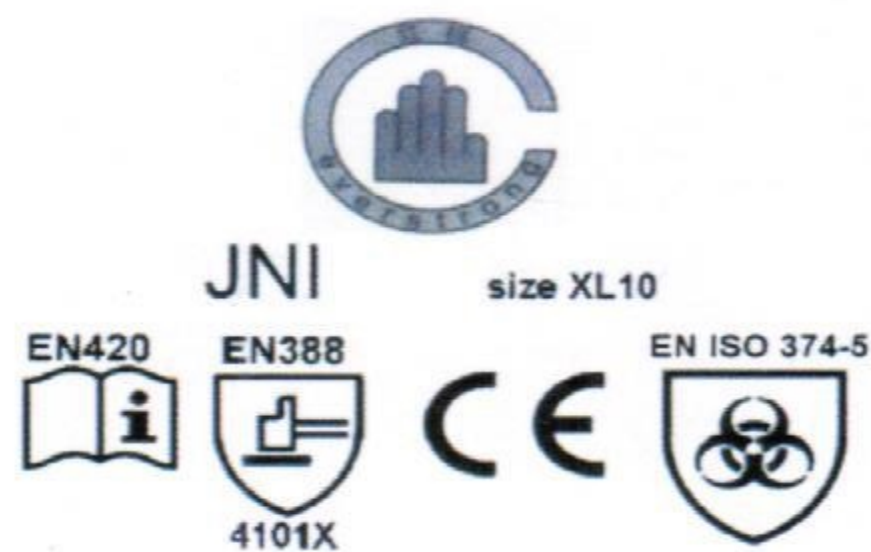

Method of marking on the glove :

PRINTING ON BACK

Packaging :

12 pairs/polybag 120 pairs/carton

MEANS OF CONTROL

1. We choose the good suppliers to provide us material with good quality. At the same time, when we received the raw materials we should test some items according to relevant standard, such as EN 420 and relevant EU directive; the bad material cannot meet requirement will be rejected.
2. when we received the raw materials for mass production, the material QC will check them serious in order that no any problem at the beginning;
3. Make samples before production, make sure samples meet the requirement of client and EN388 ,EN420,EN374-2 and other chemical items ,then start to produce; it's very important for us;
4. Regularly check the quality of products in the whole process; any unacceptable defects are found, the gloves will be discarded; QC for each step will perform inspection in accordance with our requirement strictly;
5. Confirm packing specification before packing and regularly check and keep records;
6. According to QA inspection procedures, QA will perform final inspection on some cartons of glove randomly. Then the goods can be shipped in case no any problems.

INSTRUCTION FOR USE

Glove reference : JN1

Available sizes : S/7(palm width 105mm), M/8(palm width 110mm), L/9(palm width 115mm),
XL/10(palm width 120mm), XXL/11(palm width 125mm)

Glove description :

NITRILE GLOVES

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the Directive 89/686/CEE : innocuousness, comfort, solidity.

It has been subject to a CE type Examination performed by :

C.T.C. (0075)
4, rue Hermann Frenkel
69367 LYON Cedex 07
FRANCE

Applicable standards :

The glove meets the requirements of the standard EN 420 « General requirements for work glove ». Dexterity : 5

Moreover, this glove has been designed for the following applications :

Application :

Mechanical hazard - EN 388



4 1 0 1 X

Levels of performance

Abrasion resistance	4	(on 4 maxi)
Blade cut resistance	1	(on 5 maxi)
Tear resistance	0	(on 4 maxi)
Puncture resistance	1	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	X	(A to F)
Impact Protection		

« X » means that the test hasn't been performed ; no protection is required

Application :

Micro-organism - EN ISO 374-5



Air tightness	conform
Water tightness	conform

This glove give a protection of penetration only and don't give a protection against chemical product and virus.

The quality acceptable level is 2

Protection limit :

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted. The levels of performance mentioned are only valid for the palm of the glove. The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated. These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

This glove shall not be in contact with fire.

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This information does not reflect the actual duration of protection in the workplace.

The penetration resistance has been assessed under laboratory conditions and relates only to the tested specimen.

It is recommended to check that the gloves are suitable for the intended use because the conditions at the workplace may differ from the type test depending on temperature, abrasion and degradation.

When used, protective gloves may provide less resistance to the penetration due to changes in physical properties. Movements, snagging, rubbing, degradation caused by the chemical contact etc. may reduce the actual use time significantly.

Before usage, inspect the gloves for any defect or imperfections.

Uncontrolled against viruses

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.