


KStrong Micron SRL has been designed to use as a fall arrest block and energy absorbing lanyard. It can be attached at foot level, allowing it to be used both vertically and horizontally, ensuring the users safety whilst working close to an edge. It is robust, durable and the lightest in its range. By using selected Connectors you have the ability to convert to a Twin configuration attaching to the users harness with ease.

**Features**

- Light Weight
- 360 Degree Swivel top
- High Impact Load bearing polymer casing
- Retractable webbing maximum length: 2m
- Inbuilt textile Energy Absorber for shock absorption
- Aluminum Scaffold Hook with SS Gate & Lock
- Minimum Breaking Strength >15kN.
- Used Horizontally.
- Used at Foot level –
  - Rated to Fall Factor 2
- Twin Paw Braking mechanism
- Ease of connecting the user's lanyard to the HLL using a Karabiner.
- Sharp Edge Rated (R>0.5mm).
- Can be attached to all harnesses and used with one or two units - refer attachments AFC609100 & AFC609101.
- Temperature Range -30 to +50 deg.
- QR Code for ease of identification.
- Can be supplied with a range of different hook options on request.

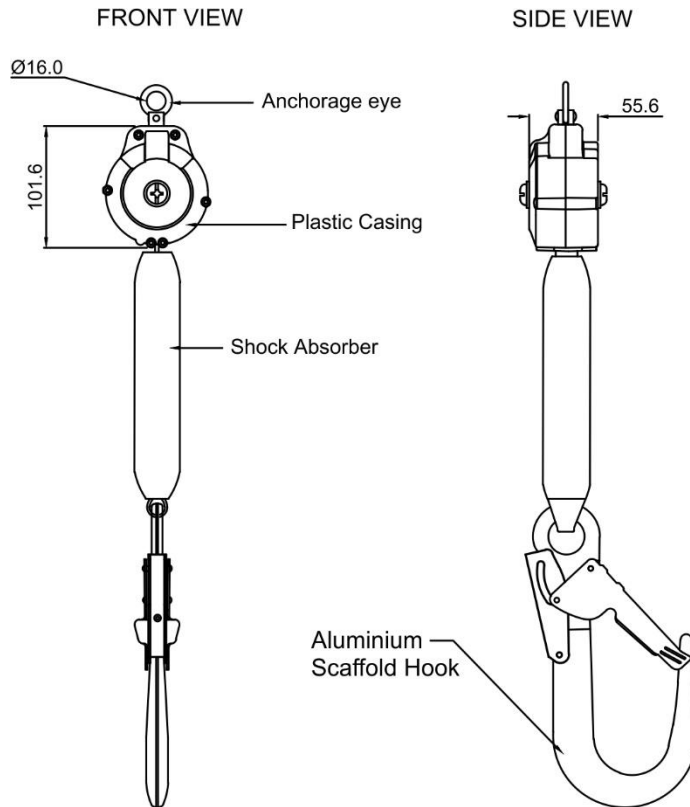

AFC609100



AFC609101



## Load Capacity

140Kg Vertical  
100Kg Horizontally

## Material

Webbing	:	Technora 21mm Wide MBS: 20kN
Casing	:	High Impact Polymer
Shock Absorber	:	Polyester Webbing
Metal Components	:	Aluminium Scaffold Hook Material : Aluminium Alloy Body SS Gate & Lock MBS: 22kN
	:	Dorsal Micron Connector Major Axis: 20 kN Minor Axis: 15kN

## Weight

1180 gm ± 20 gm

## How To Use

Refer to User Instruction Manual



## Relevant Standards

EN 360:2002, VG11 RFU # 11.060

